

## **GEPVp-200-MS** 200 WATT PHOTOVOLTAIC MODULE FOR 600 VOLT APPLICATIONS

### FEATURES

- 54 poly-crystalline cells connected in series
- Peak power of 200 watts at 26.3 volts
- Designed for optimum use in residential and commercial grid-tied applications
- 20-year limited warranty on power output, 5-year limited warranty on materials and workmanship\*
- Junction box and 1.8 meter cable with easy-click Solarlok Connectors included

### BENEFITS

- Output power tolerance of +/- 5%
- Robust, clear anodized aluminum frame with pre-drilled holes for quick installation

### CERTIFICATIONS

The GEPVp-200-MS Module meets the following requirements:



UL-1703



IEC-61215




\*Refer to GE Energy Product Warranty for specific details



imagination at work

## PHYSICAL CHARACTERISTICS

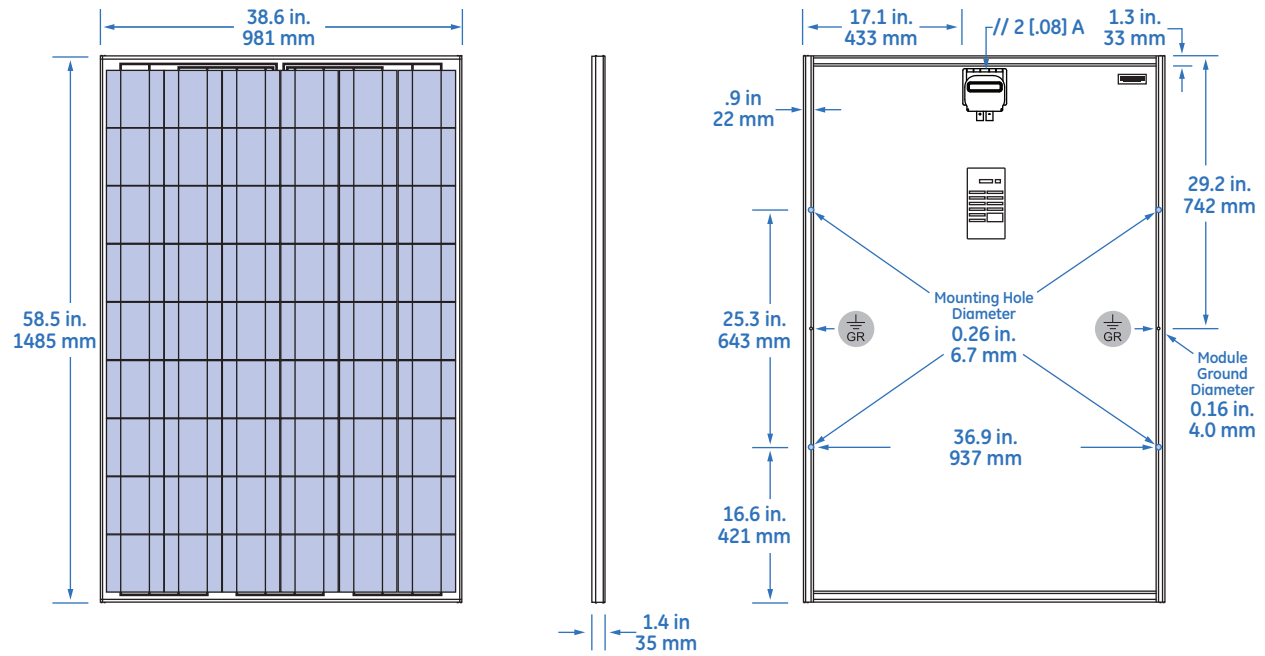


### Physical Design Properties

Weight	39.0 lb [17.7 kg]
Weight (Wind) Bearing Potential	50 lbs/ft <sup>2</sup> [125 mph equivalent]
Hailstone Impact Resistance	1" @ 50 mph [25 mm @ 80 kph]

## ELECTRICAL PERFORMANCE

### Typical IV Curve for GEPVp-200-MS Module

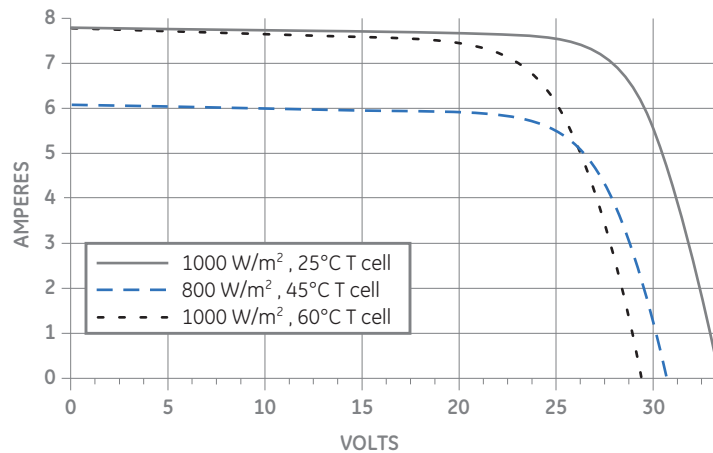

### Typical Performance Characteristics

Peak Power (Wp)	Watts	200
Max. Power Voltage (Vmp)	Volts	26.3
Max. Power Current (Imp)	Amps	7.6
Open Circuit Voltage (Voc)	Volts	32.9
Short Circuit Current (Isc)	Amps	8.1
Short Circuit Temp. Coefficient	mA/°C	5.6
Open Circuit Voltage Coefficient	V/°C	-0.12
Max. Power Temp. Coefficient	%/°C	-0.5
Max. Series Fuse	Amps	15
Max. System Voltage	Volts	600
Normal Operating Cell Temperature [NOCT]	deg. C	45

IV parameters are rated at Standard Test Conditions (Irradiance of 1000 W/m<sup>2</sup>, AM 1.5G, cell temperature 25°C). As with all poly-crystalline PV Modules, during the stabilization process that occurs during the first few days in service, module power may decrease approximately 3% from typical maximum power due to a phenomenon known as Light Induced Degradation (LID). All measurements are guaranteed at the laminate leads. NOCT is measured at 800 W/m<sup>2</sup>, 20 deg. C ambient, and 1 m/s windspeed.



GE Energy  
231 Lake Drive  
Newark, DE 19702  
302-451-7500

[ge-energy.com/solar](http://ge-energy.com/solar)

GEA-14807A (05/08) Photo: PSP30590-03

